

THE POSSIBILITIES ARE INFINITE

FUJITSU

**A4** COLOR  
DUPLIX  
DOCUMENT  
SCANNER


# fi-5110C

Image Scanner



<b>A4</b>	<b>ADF</b>	<b>Straight Path</b>	<b>DUPLIX</b>	<b>COLOR</b>	<b>IR Multi Feed Detection Sensor</b>	<b>USB 2.0/1.1</b>	<b>Mono. 30 A4 ipm</b>	<b>Color 30 A4 ipm</b>	<b>600 dpi</b>
-----------	------------	----------------------	---------------	--------------	---------------------------------------	--------------------	------------------------	------------------------	----------------

Win98SE WinMe Win2000 Professional Win XP

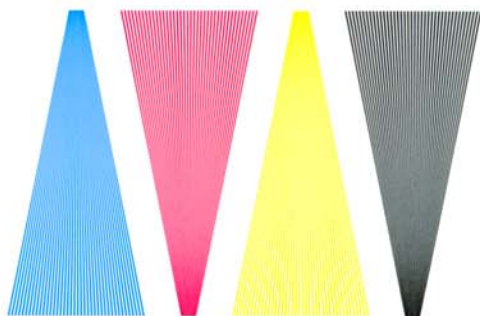

**Adobe** Bundled!  
**Acrobat** 6.0  
Standard

● Convert any document to a PDF file

for Microsoft® Windows®  
Operating Systems



● FUJITSU TWAIN Driver

POWERED BY



● Genuine Pixel Translations ISIS driver



As an ENERGYSTAR® Partner, Fujitsu has determined that this product meets the ENERGYSTAR® guidelines for energy efficiency. ENERGYSTAR is a U.S. registered mark.

**QUALITY SCANNER**

## fi-5110C Image Scanner

The fi-5110C image scanner with USB 2.0 interface capability expands the market for production scanning. These features will insure Fujitsu's customers' productivity well into the future.

- **Small Footprint**  
(W) 293.5 x (H) 130.0 x (D) 166.0mm
- **Fast scanning speed in its class**  
-15ppm/30ipm A4 portrait at 150dpi (color)  
-15ppm/30ipm A4 portrait at 200dpi (monochrome)
- **Superior paper handling**  
-50 Sheet ADF Capacity  
-IR multi feed detection  
-Straight paper path and easy maintenance
- **Excellent image quality**  
-Optical Resolution of 600dpi  
-Image processing software V2.0 (Option)  
-Superior CCD (charge-coupled device) image sensing technology  
-Supports sRGB technology
- **Superior input/output performance**  
-USB 2.0 interface
- **Easy to use**  
-Bundled with ScandAll21, Adobe Acrobat 6.0 Standard and other software



## TECHNICAL SPECIFICATIONS

Scanner Type		ADF (Automatic Document Feeder)
Image Sensor Type		Color CCD (Charge-Coupled Device) x 2
Light Source		White cold cathode discharge lamp
Optical Resolution		600 dpi
Output Resolution	Color	50 - 600 dpi
	Grayscale	50 - 600 dpi
	Monochrome	50 - 600 dpi
AD Converter		1024 levels (10 bit)
Gray Scale Level	Color	8 bit and 24 bit / pixel
	Grayscale	8 bit / pixel
	Monochrome	1 bit / pixel
Scanning Speed (A4 portrait)	Color	150 dpi 15 ppm(Simplex) / 30 ipm(Duplex)
	Monochrome	200 dpi 15 ppm(Simplex) / 30 ipm (Duplex)
Document Size	Minimum	A8 (53 x 74mm)
	Maximum	A4 (210 x 297mm) or legal (216 x 355.6mm)
Document Weight (Thickness)		52 to 127 g/m <sup>2</sup> , or 14 to 34 lb
Capacity		Maximum 50 sheets, 80 g/m <sup>2</sup> or 20 lb
Background		White
Interface		USB 2.0 x 1 *Also works with USB 1.1
Connector shape		USB (B type)
Image Processing		Image emphasis, simplified DTC, error diffusion, dither, moire removal Non-dropout color (Generated by the driver)
Voltage or Voltage Range		AC 100 to 240V, +10% / -10%
Power		Operating: 28W Sleep mode: less than 6W Turned off while plugged in: 1W
Operational Environment	Temperature	Temperature: 5 to 35 degree C (42 to 95 degree F)
	Relative humidity	Relative humidity: 20 to 80% (non-condensing)
Dimensions	Width	293.5mm (11.6 in)
	Depth	166mm (6.5 in)
	Height	130mm (5.1 in)
Weight		2.7kg
Option		Image processing software option V2.0
Others	Multi feed detection	Yes, IR multi feed detection sensor
	Long paper scanning	864mm (34 in)
	Paper counter	Yes

### Consumables

Pick Roller	PA03360 - 0001	Lifetime: Every 100,000 sheets or one year
Pad ASSY	PA03360 - 0002	Lifetime: Every 50,000 sheets or one year

Microsoft, Windows and Windows NT are registered trademarks of Microsoft Corporation in the United States and/or other countries.  
ISIS, QuickScan and their respective logos are trademarks or registered trademarks of Pixel Translations, a division of Captiva Software Corporation.  
Adobe, Adobe logo and Acrobat are either registered trademarks of Adobe Systems Incorporated in the United States and/or other countries.  
Other product names are the trademarks or registered trademarks of the respective companies.  
Specifications are subject to change without notice. For the latest information, contact your local Fujitsu representative. First edition September 2004

### Fujitsu Asia Pte Ltd

20 Science Park Road #03-01 TeleTech Park  
Singapore Science Park II Singapore 117674  
SINGAPORE  
Tel: (65) 6512 7555 Fax: (65) 6512 7499  
<http://sg.fujitsu.com/scanner>

### Fujitsu (Malaysia) Sdn Bhd

Level 1 & 2 3505 Jalan Teknokrat 5  
63000 Cyberjaya Selangor  
MALAYSIA  
Tel: (603) 8318 3700  
Fax: (603) 8318 8700

### PT Fujitsu Systems Indonesia

Wisma Kyoei Prince  
Jl. Jend. Sudirman Kav. 3-4  
Jakarta 10220  
INDONESIA  
Tel: (62-21) 570 9330  
Fax: (62-21) 573 5150